Cisco Data Centers

ACI CORE

ACI Attachable Entity Profile (AEP)

Tenant Policies EPG

AEP in ACI

- The AEP maps **domains** to **interface policies**, with the ultimate goal of mapping VLANs to interfaces.
- AEPs are used simply to define which interfaces can be used by **EPGs** and **L3Outs** through domains.
- If desired, AEPs allow a one-to-many relationship to be formed between interface policy groups and domains
- When the EPG configuration deploys a VLAN on a port, the VLAN and the port must belong to the same domain using a VLAN pool and an AEP, respectively.
- It is common practice to create one AEP for physical and L3 domains and another AEP for each VMM domain.

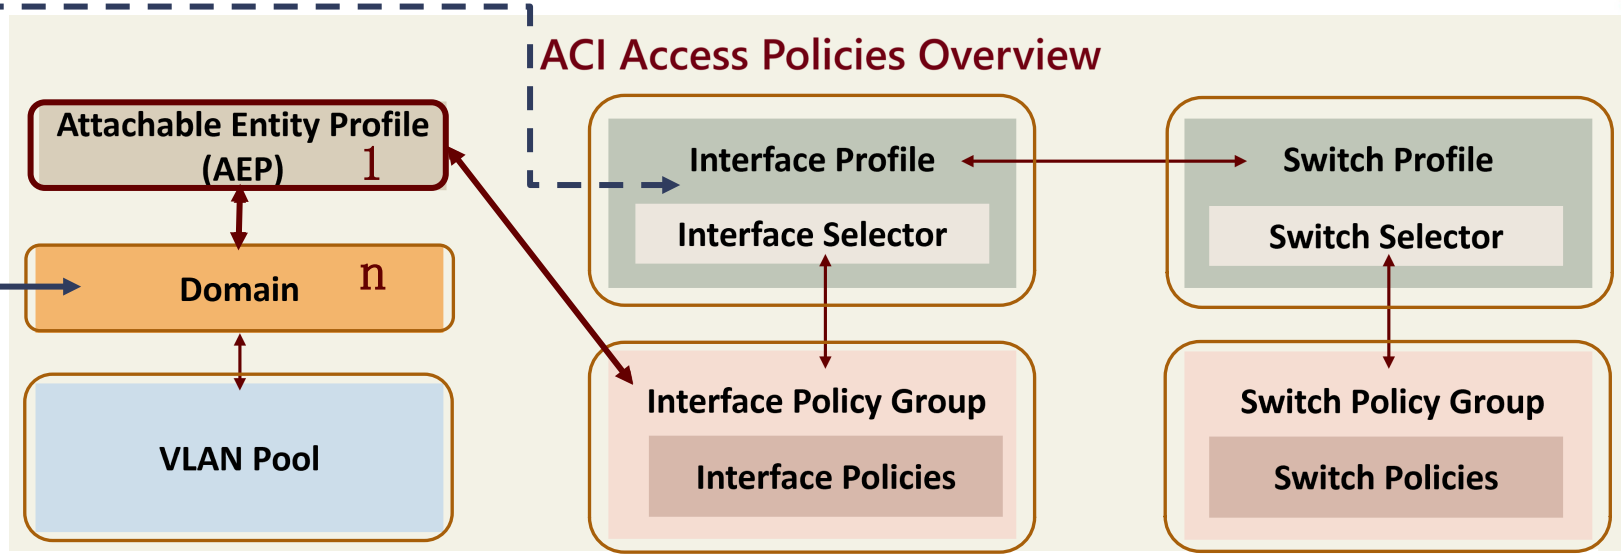

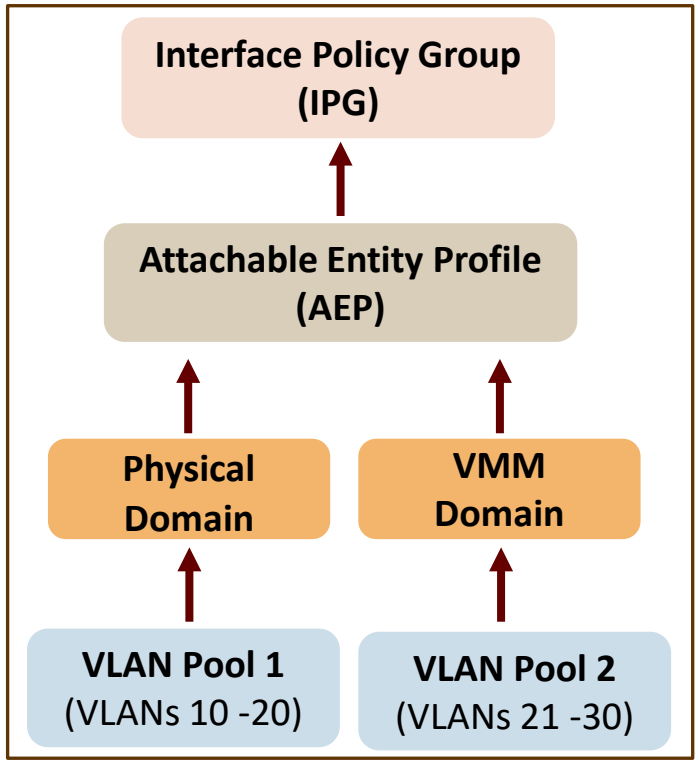

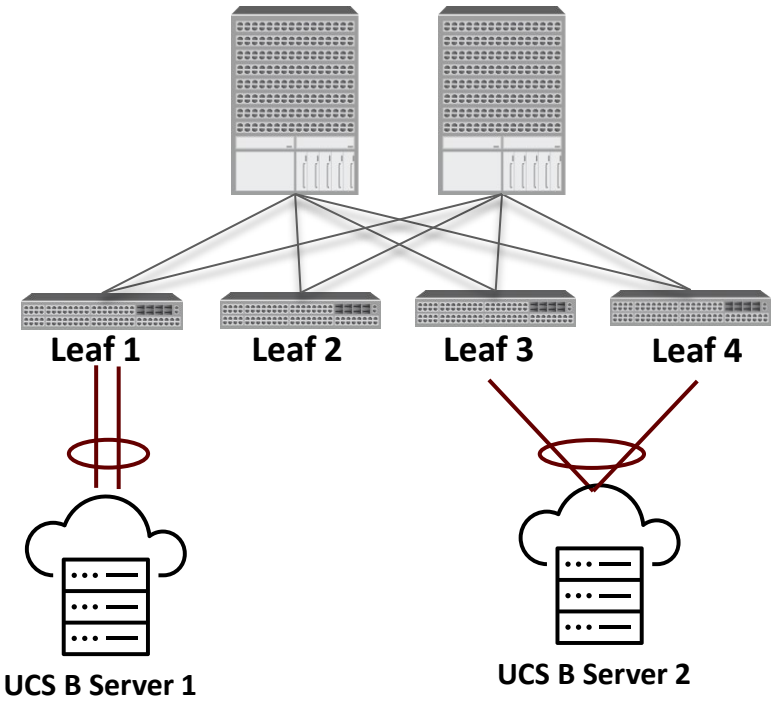

UCS B Servers are used for Bare-Metal and VMM workloads

Thanks for watching!

LearnWithSalman